

ODVA EtherNet/IP Extension (Explicit Messaging)

Supported Series: Crevis EtherNet/IP NA-9188



Website: <http://www.crevis.co.kr/>

HMI Setting:


Parameters	Recommended	Options	Notes
PLC type	ODVA EtherNet/IP Extension (Explicit Messaging)		
PLC I/F	Ethernet		
Port no.	44818		

Tag Manager:

1. Please click the **[Tag Manager]** button, then click the **[Browse]** button. The found objects will be displayed on the list.

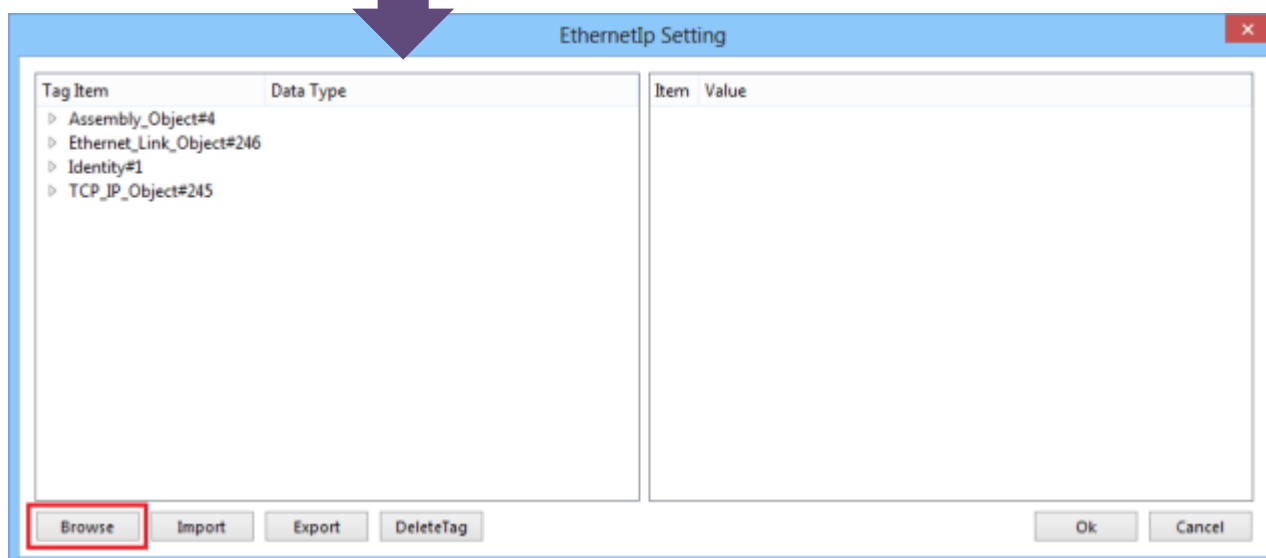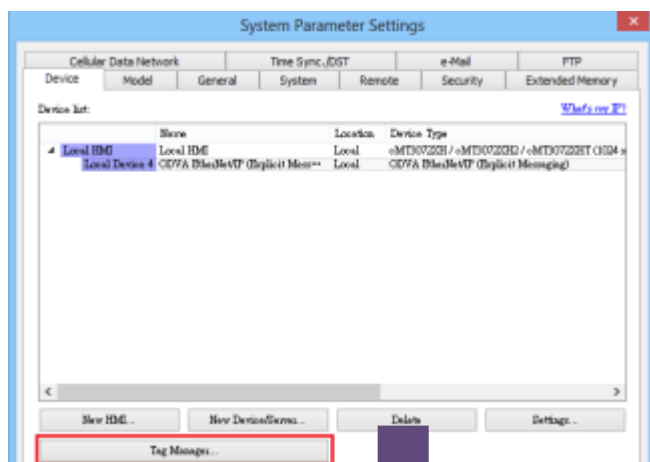

2. To edit address tag, please see the factory manual.

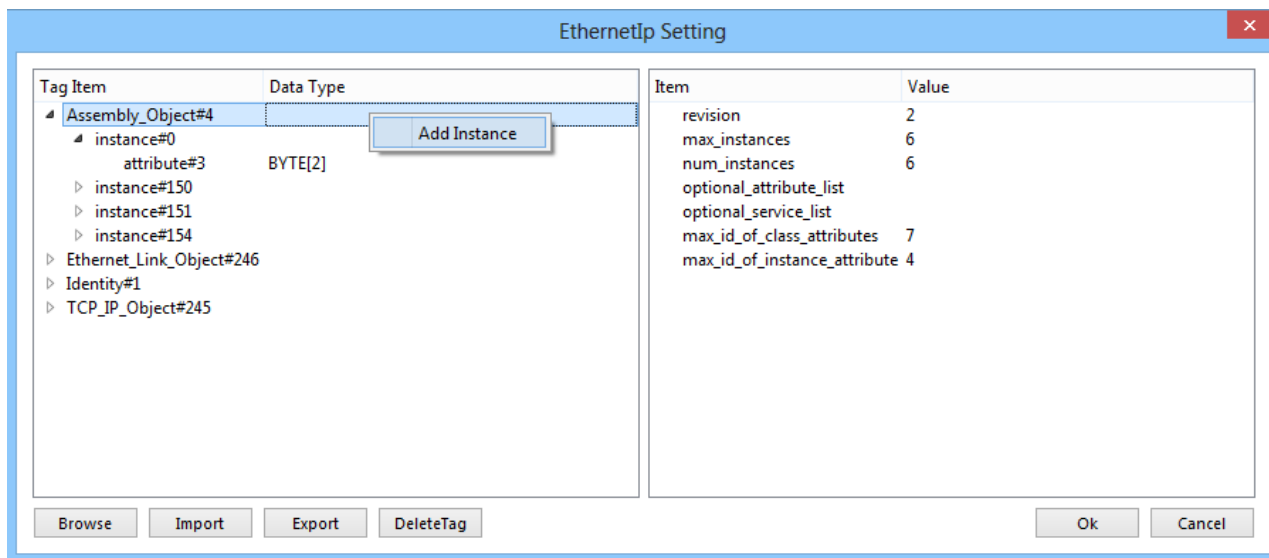

The following is an example of how to add Vendor ID in Tag Editor. See 3.2.3 *Identity Object* in factory manual for the detail of this ID.


3.2. Identity Object

Class Code: 01_{HEX}

3.2.3. Instance Attributes


Instance ID	Attribute ID	Access Rule	Name	Data Type	Value
1	1	Get	Vendor ID	UINT	741 _{DEC} (Crevis Co., Ltd)
	2	Get	Device Type	UINT	0C _{HEX} (Communications Adapter)
	3	Get	Product Code	UINT	512 _{DEC} (NA-9188)
	4	Get	Revision	Structure of:	
			- Major	USINT	1 ~ 9
			- Minor	USINT	1 ~ 255

Under Struct-Defined select Identity to add Vendor_ID. {1,1,1} represents {**Class code** , **Instance ID** , **Attribute ID**}. Enter "UINT" in Data Type field according to the factory manual. When finished, this data member can be found in Identity Object.

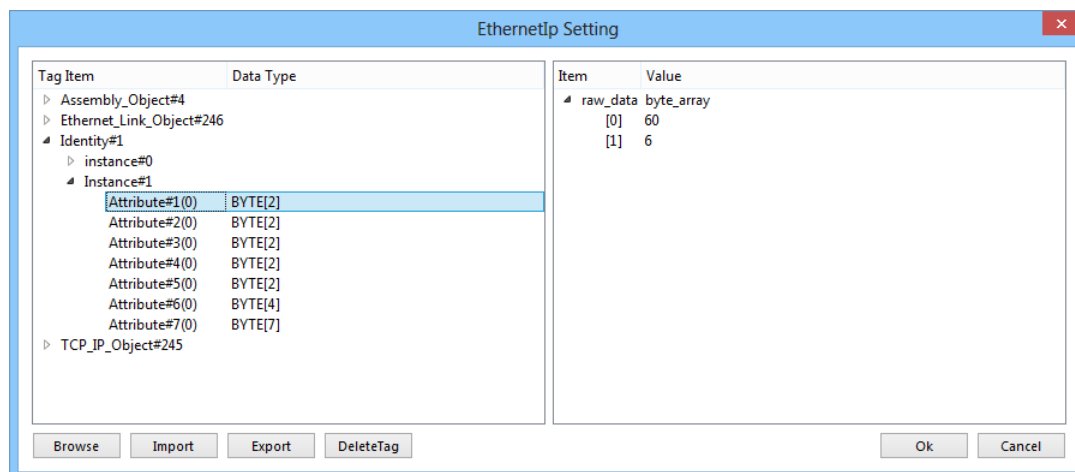

Limitations:

1. If offset is set for a user-defined tag, data cannot be written.
2. If the user-defined tag length is inconsistent with the server, data cannot be written.

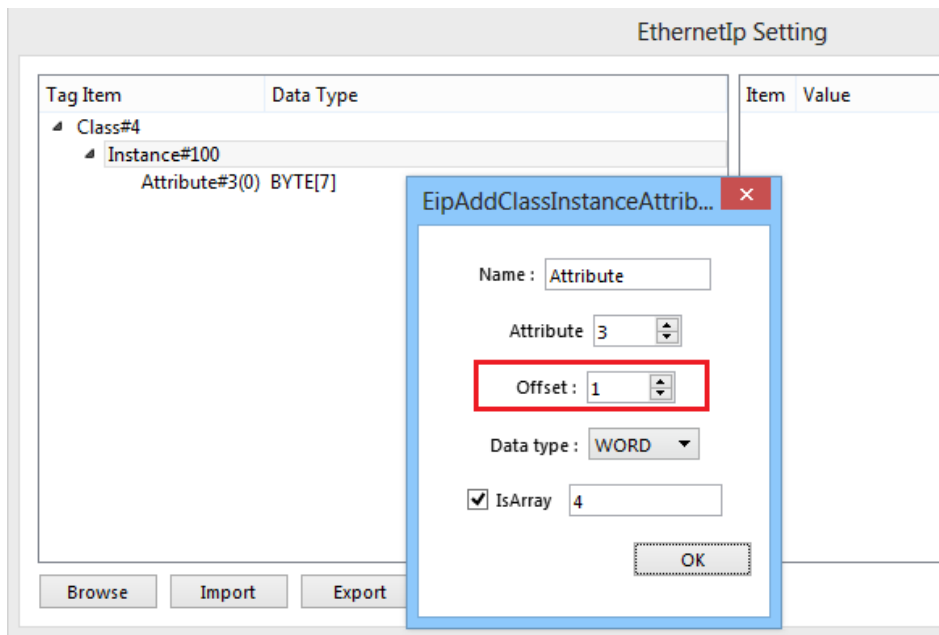

3. [Binary Access]

Not suitable for fast writing in HMI, for example: momentary objects, which will conflict with PLC control and cause abnormal reading and writing status.

Support Device Type:

Data type	EasyBuilder data format	Memo
Bool	bit	
Byte	16-bit BCD, Hex, Binary, Unsigned	8-bit
SInt	16-bit BCD, Hex, Binary, Signed	8-bit
USInt	16-bit BCD, Hex, Binary, Unsigned	8-bit
Word	16-bit BCD, Hex, Binary, Unsigned	16-bit
Int	16-bit BCD, Hex, Binary, Signed	16-bit
UInt	16-bit BCD, Hex, Binary, Unsigned	16-bit
DWord	32-bit BCD, Hex, Binary, Unsigned	32-bit
DInt	32-bit BCD, Hex, Binary, Signed	32-bit
Real	32-bit Float	32-bit
UDInt	32-bit BCD, Hex, Binary, Unsigned	32-bit
Array	Word array for ASCII input and display	Length=word

Wiring Diagram:

Ethernet cable:

