

CAN Bus 2.0A/2.0B General and SAE J1939

Symbolic

Supported series: CAN Bus 2.0A / CAN Bus 2.0B / SAE J1939.


HMI Setting:

Parameters	Recommended	Options	Notes
PLC type	CAN Bus 2.0A/2.0B General and SAE J1939 Symbolic		
Baud rate	250K	20K~1M	
Node ID	1	1~127	
Protocol	2.0a	2.0a / 2.0b	
Address	0x000 ~ 0x7ff		
Cycle time	0000 ~ 1000		
RPDO command with 8 byte			
Send NMT START Command		Use default command Use user-defind command	

Online simulator	NO	Extend address mode	NO
-------------------------	----	----------------------------	----

How to create address tags in tag manager:


1. Select communication protocol.
2. Enter address.
3. Enter cycle time.
4. Add item.

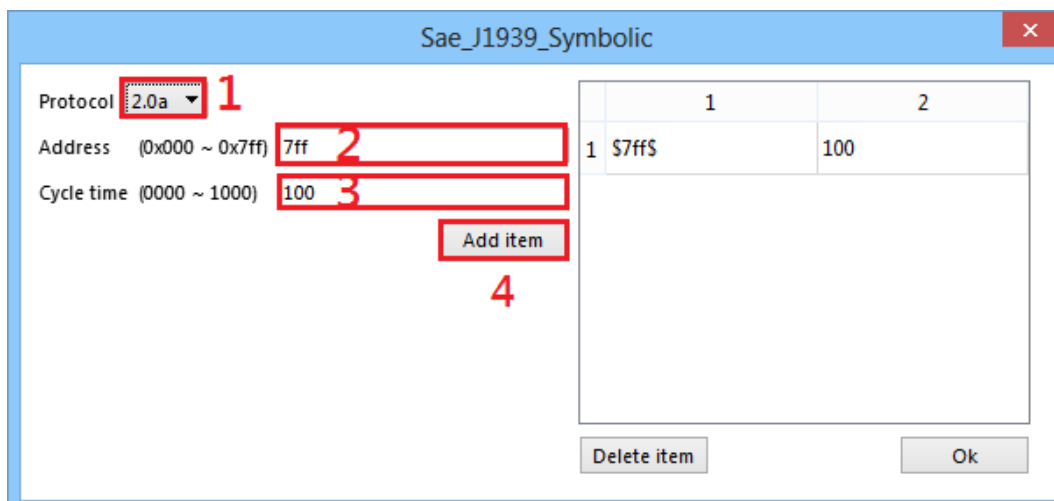

Wiring Diagram:

CANBus

The serial port pin assignments may vary between HMI models, please click the following link for more information.

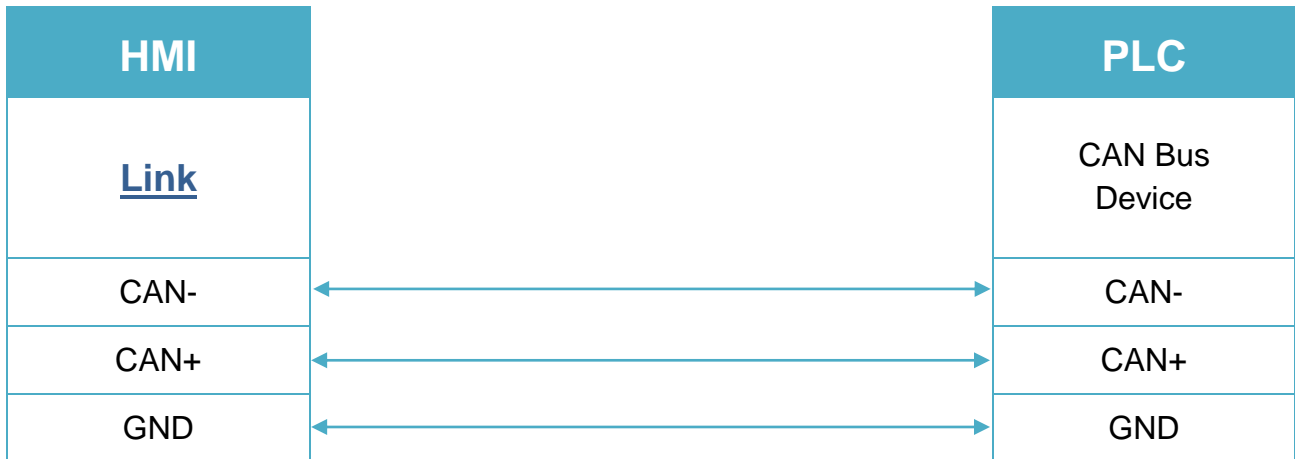

To minimize signal reflection on the CAN bus network, termination resistors should be installed at both ends of the network, as shown in the following figure.

