

## Parker ACR9000

Supported Series: Parker ACR9000.

Website: <http://www.parkermotion.com>

### HMI Setting:

Parameters	Recommended	Options	Notes
PLC type	Parker ACR9000		
PLC I/F	RS232	RS485 4W / RS232/Ethernet	
Baud rate	38400	1200 - 38400	
Data bits	8	7,8	
Parity	None	Even, Odd, None	
Stop bits	1	1,2	
Port no.	5006		
PLC sta. no.	0		

<b>Online simulator</b>	YES
-------------------------	-----

### Device Address:


Bit/Word	Device type	Format	Range	Memo
B	P_Low16bit	DDDDDDdd	0 ~ 9999915	
B	P_High16bit	DDDDDDdd	0 ~ 9999915	
W	P_Int32	DDDDD	0 ~ 99999	
W	P_Float	DDDDD	0 ~ 99999	

## Wiring Diagram:

### Diagram 1

#### RS-232

The serial port pin assignments may vary between HMI models, please click the following link for more information.

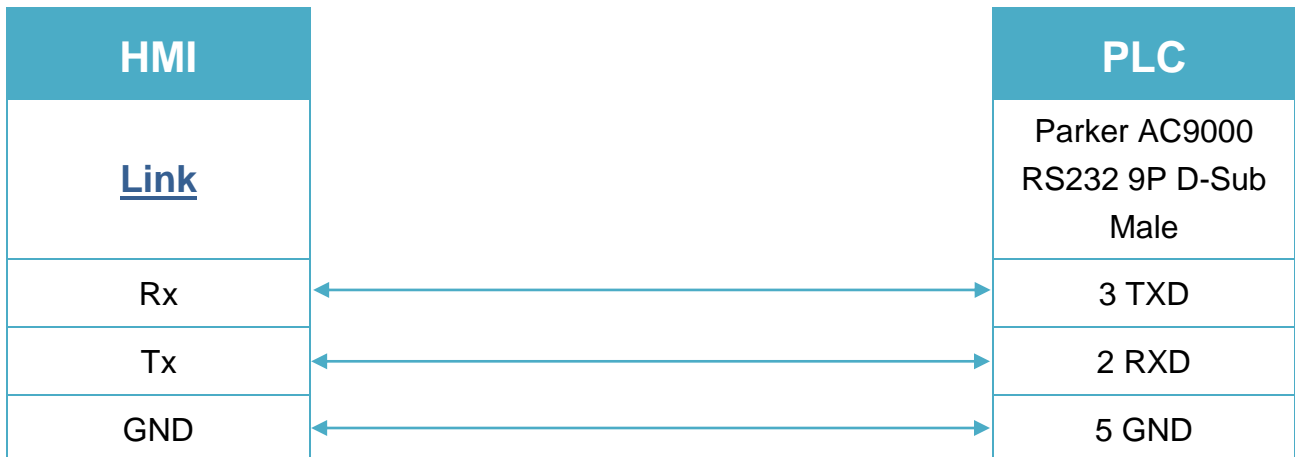

### Diagram 2

#### Ethernet cable:

