

MODBUS ASCII

Supported Series: MODBUS ASCII CONTROLLER

Website: <http://www.modbus.org>

HMI Setting:

Parameters	Recommended	Options	Notes
PLC type	MODBUS ASCII		
PLC I/F	RS485	RS232/RS485	
Baud rate	9600	9600/19200/38400/ 57600/115200	
Data bits	8	7,8	
Parity	Even	Even, Odd, None	
Stop bits	1	1,2	
PLC sta. no.	1	0-255	

Online simulator	YES	Broadcast command	YES
Extend address mode	YES		

PLC Setting:

Communication mode	Modbus ASCII protocol
--------------------	-----------------------

Device Address:

Bit/Word	Device type	Format	Range	Memo
B	1x	DDDDDD	1 ~ 65535	Input bit (read only)
B	0x	DDDDDD	1 ~ 65535	Output bit
B	3x_Bit	DDDDDDdd	100 ~ 6553515	Input Register bit (read only)
B	4x_Bit	DDDDDDdd	100 ~ 6553515	Output Register bit
B	6x_Bit	DDDDDD	100 ~ 6553515	
W	3x	DDDDDD	1 ~ 65535	Input Register (read only)
W	4x	DDDDDD	1 ~ 65535	Output Register
W	6x	DDDDDD	1 ~ 65535	
DW	3x_Double	DDDDDD	1 ~ 65535	
DW	4x_Double	DDDDDD	1 ~ 65535	

Note: EBPro V6.03.02 or later supports 64 bits data type, but please note that the address limit range is 48 bits in maximum.

Modbus RTU function code:

0x	0x01 Read coil	0x05 write single coil
1x	0x02 Read discrete input	N/A for write operation
3x	0x04 Read input register	N/A for write operation
4x	0x03 Read holding register	0x10 write multiple registers
3xbit is equivalent to 3x		
4xbit is equivalent to 4x		

Wiring Diagram:

Diagram 1

RS-232

The serial port pin assignments may vary between HMI models, please click the following [link](#) for more information.

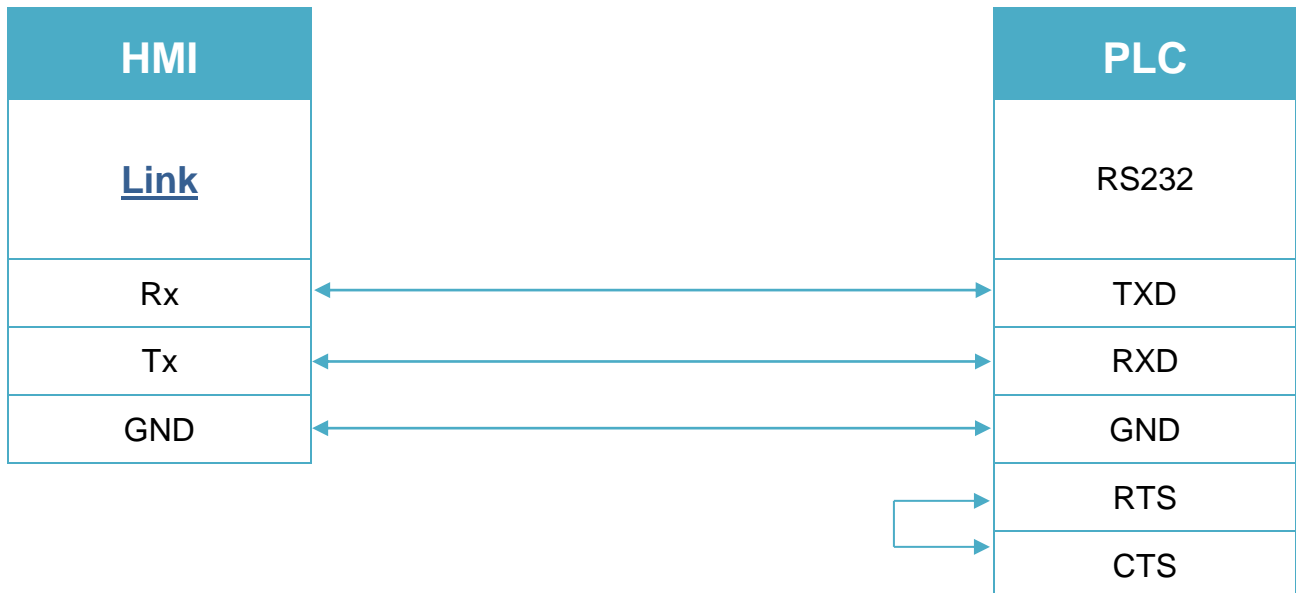


Diagram 2

RS-485 4W

The serial port pin assignments may vary between HMI models, please click the following link for more information.

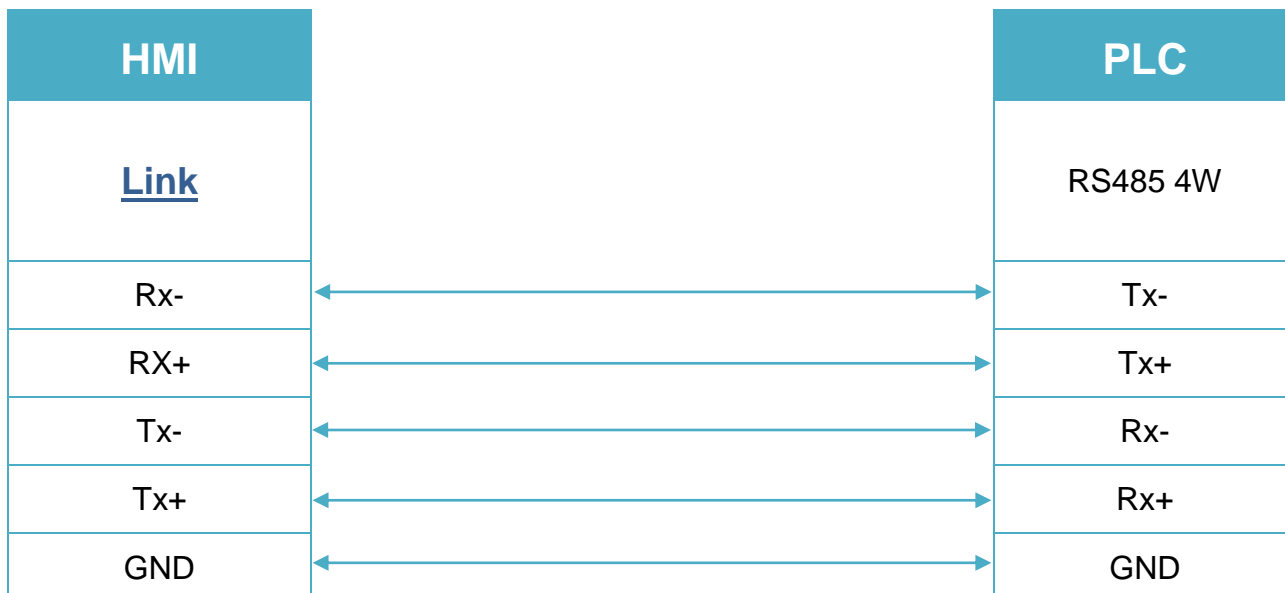


Diagram 3

RS-485 2W

The serial port pin assignments may vary between HMI models, please click the following link for more information.

